
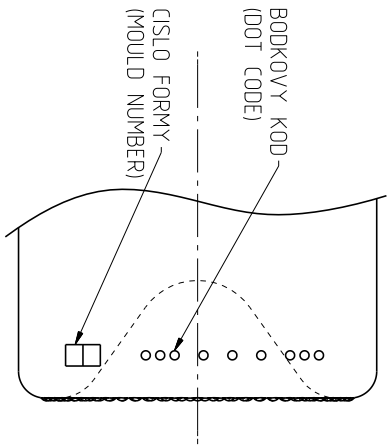
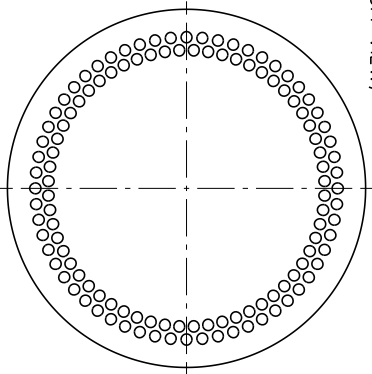


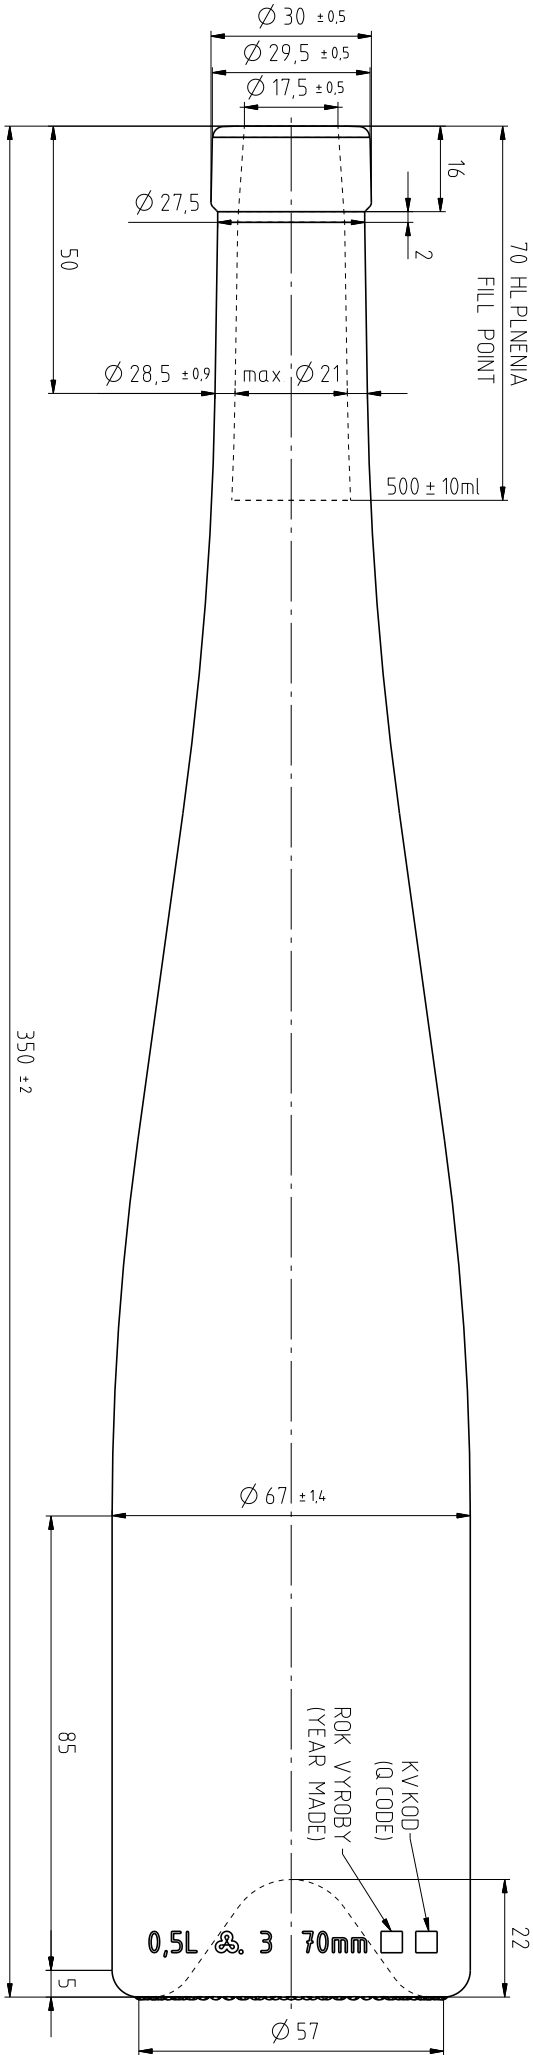

INDEX	ZMENY / modifications										DATE	MEMO	SIGNAS TECHNOLÓGIA PT approved										TEP.DIA. PLUMIA Filling temperature		TEP.DIA. SPRACOVANIA Conditioning temperature		TOTAL.OB.EFM Capacity fillpoint		POZNAMKA Remarks	
	SUA.VYR.TYPU FIB released										VYR.ZMUDI DATE		VIS		TEP.DIA. Adt		≤ 15 °C		500 ml ± 10 ml		ZAKAZNIK Customer									
	VYR.ZMUDI DATE										VIS		≤ °C		521 ml ± ml		PODOBNY AKO Similar to													
	VYR.ZMUDI DATE										VIS		OBSAH CO ₂ CO ₂ content		≤ g/l		HNOTNOST Approx. glass weight		500 g		Podoobny ako									
	VYR.ZMUDI DATE										VIS		OBSAH ALKOHOLU Alcohol content		≤ 14. Va%		STREDNA.HABRBA STENY Average wall thickness		mm		NARADZUJE Replace No									
	NETOLEROVANE ROZMERY POUL.A DIN 6129 dimensions without tolerances conforms to standard DIN 6129										AXIALNE.ZABAZDINE Axial pressure		100 dan		PRECHER.POD.USITM Neck connection dia		27,5 mm		POMUKA.CISLO Order No											
	POUZITIE Disposal										MM		AW		EW		X		VNUTROBY.PRIMER.KALIBRA In through bore		16,5 mm		MERKA Scale							
	PROCES Process										BB		PB		EPB		FARBA Color		WE		KRESLU Scale		11		DIA.TYP Filetyp					
																									AZ					