


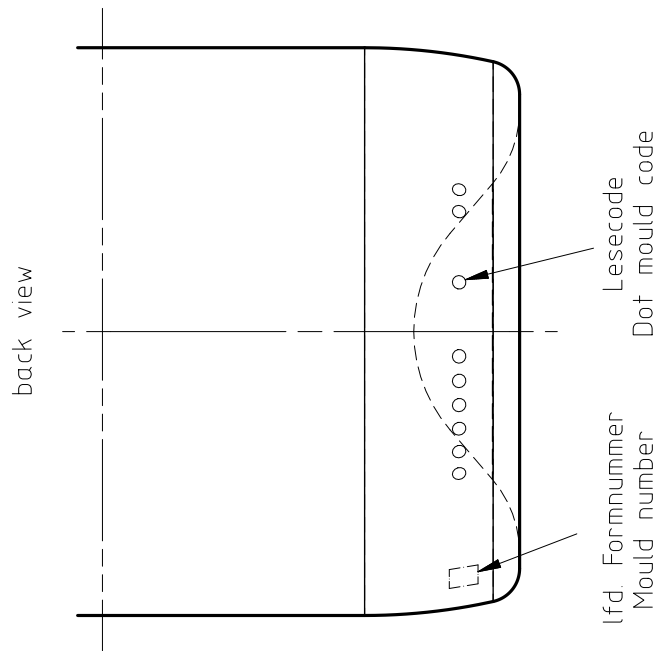

We declare our agreement with this drawing and the stated tolerances and hereby give our "Good for Execution".

INDEX	AENDERUNGEN / modifications		DAT	NAME	PT GEPRUEFT PT approved		DAT 23.11.20	VIS May	ABFUELLTEMPERATUR Filling temperature		≤ 15 °C	VOLUMEN FUELLVOLL Capacity fillpoint		750 ml ± 10 ml	BEMERKUNG Remarks		WF 2064
C D	CO2-content removed		6.7.17 23.11.20	May Fah	FIB FREIGABE FIB approved	WERK GOS	DAT 23.11.20	VIS YRM	KONDITIONIERUNGSTEMP. Conditioning temperature		≤ °C	VOLUMEN RANDVOLL Capacity brimful		ca. 770 ml ± ml	KUNDE Customer		Standard
	CO ₂ GEHALT CO ₂ content								≤ 4 g/l	GLASGEWICHT CA Approx. glass weight		400 g	AEHNLICH WIE Similar to				
	FS FREIGABE FS approved	WERK GOS			DAT 23.11.20	VIS BLM	ALKOHOLGEHALT Alcohol content		≤ 16 Vol%	MITTL. WANDSTAERKE Average wall thickness		2,48 mm	ERSETZT NR Replace No		4W014.0750.0008_C		
	NICHT TOLERIERTE MASSE NACH NORM DIN 6129 dimensions without tolerances conform to standard DIN 6129				KOPFDRUCK Axial pressure			200 daN			HALSANSCHLUSS-D Neck connection dia.		27,5 mm	OFFERT-NR Offer No			
					VERWENDUNG Disposal	MW	AW	EW	X	HALSDURCHGANG-D MIN Min. through bore		16,5 mm	MASSTAB Scale		1:1		
					PROZESS Process	BB	PB	EPB	FARBE Color			GEZ Des	Mes	DAT 08.02.11	DATEITYP Filetyp	AZ	
Vetropack Austria GmbH AT-3380 Poechlarn Tel: 0043-27 57 75 41 www.vetropack.com																	
BEZEICHNUNG Designation BDO 410 BM 17,5 750ml BM																	
ARTIKEL-NR Item No 4W014.0750.0008															INDEX D		